

HB8830X, HB8831BABY

SMART WRISTBAND

WATER AND DUST PROOF DISPOSABLE WRISTBAND

HB8831BABY

HB8830GEN

HB8830PI

HB8830BU

HB8830GE




HB8830X, HB883IBABY Smart Wristband

The Smart Wristband can be programmed on demand using an RFID reader/writer at a frequency of 13.56MHz. Available in a choice of four RFID inlays, available with custom logo.

RFID Smart Wristband Specification

Model No.	HB8830BU	HB8830GEN	HB8830GE	HB8830PI	HB883IBABY
Operating temperature	-40°C to 70°C	-40°C to 70°C	-40°C to 70°C	-40°C to 70°C	-40°C to 70°C
Storage temperature	-40°C to 80°C	-40°C to 80°C	-40°C to 80°C	-40°C to 80°C	-40°C to 80°C
Material	PVC	PVC	PVC	PVC	PVC
Water proof	Y	Y	Y	Y	Y
Technology					
I-CODE-I	Y	Y	Y	Y	Y
I-CODE-SLI	Y	Y	Y	Y	Y
Mifare S50	Y	Y	Y	Y	Y
Texas Instruments(Tag-it HF)	Y	Y	Y	Y	Y
Texas Instruments(Tag-it HF-I)	Y	Y	Y	Y	Y

Dimension: (unit: mm)

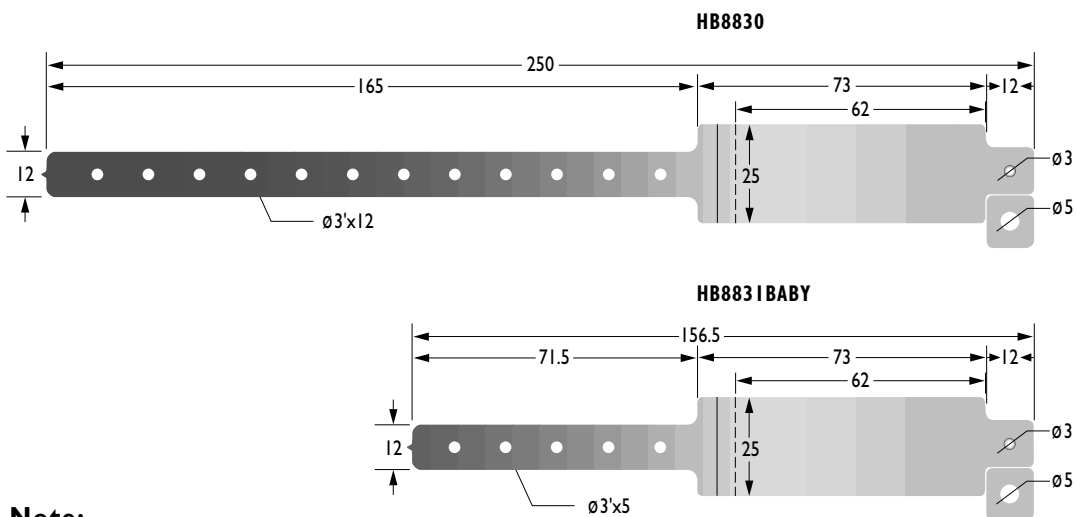

Note:

Unit is mm.

Dimension tolerance is +/-1mm.

Application:

Personnel Management such as patient, prisoner, special personnel, and animal management or goods packaging labeling.